




**MP400 Series
Deep Well Pump**

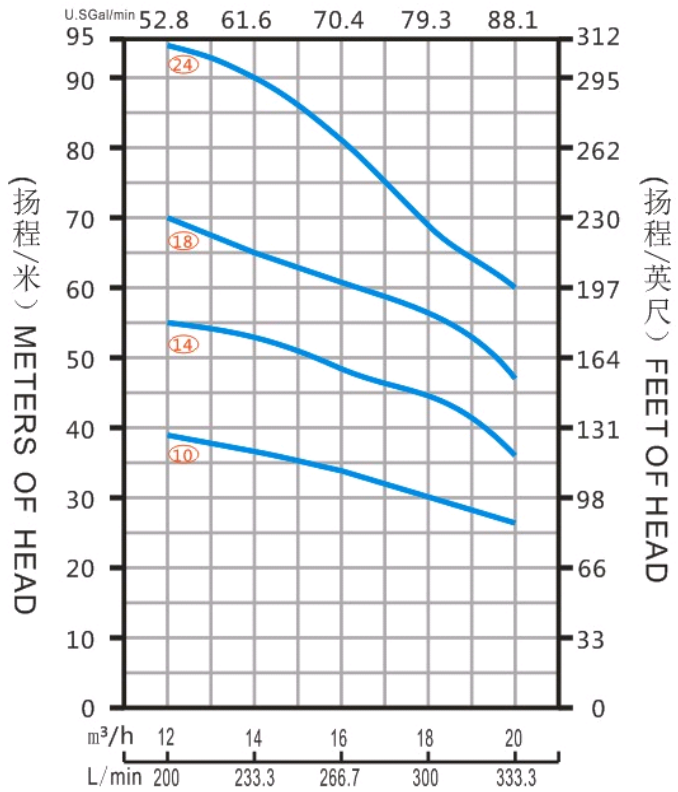

Performance Table

Model	Pump p Ø	Motor		Q	Flow rate					O.D. (mm)	Outlet (mm)	Pump Length (mm)	Pump Weight (Kg)	
		HP	kW		L/min	20	233.	266.	30					333.
					M3/h	0	3	7	0					3
MP400/10	4"	4	3	Meter Head (m)	39	37	34	30	26	96	50 (2")	926	5.9	
MP400/14	4"	5.5	4		55	53	48	45	36			1,201	7.6	
MP400/18	4"	7.5	5.5		70	65	61	57	47			1,475	9.3	
MP400/24	4"	10	7.5		94	90	81	68	60			1,887	11.8	

4" three phase motor (380V±5% 50HZ 60HZ)

電機功率		電流	功率因素	轉速	長度	重量
HP	kW	A	COSφ	rpm	mm	kg
0.55	0.37	1.2	0.68	2850	370	7.5
0.75	0.55	1.6	0.70	2850	390	8.1
1.1	0.75	1.8	0.72	2850	410	8.9
1.5	1.1	3.1	0.74	2850	420	9.7
2	1.5	4	0.76	2850	445	11
3	2.2	5.6	0.77	2850	555	13.8
4	3	7.6	0.77	2850	639	18.2
5.5	4	9.6	0.8	2850	694	21.5
7.5	5.5	14	0.82	2850	794	26.5
10	7.5	16.5	0.83	2850	929	32.4

7.5 kw and below with a 4" oil-filled motor

Size parameters for reference only, subject to change without notice.

Unit 3, Blk. A1, 17/F Hang Wai Ind. Centre, No.6 Kin Tai St., Tuen Mun, N.T., H.K. ※明力油壓機械工程※