

## LS series Ø max 1/2" up to 50 m length and max Ø 1" up to 20 m length




Art. no. 9251 - 9252 - 9253 - 9256

Art. no. 9251 - 9252 - 9253 - 9256

Manual, hand crank hose reel, **LS series**, in black painted steel, suitable for hoses of max 50 m length in 1/2".

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease, compressed air and water at low and high pressure.

Please see catalogue pages 242 and 243 for the selection of the required hoses.



Art. no. 9767  
Art. no. 9768

Pivoting wall mounting bracket



Art. no. 9255

Art. no. 9254 - 9255

Manual, hand crank hose reel, **LS series**, in black painted steel, suitable for hoses of max 20 m length in 1" or max 30 m length in 3/4".

The hose reel is supplied without hoses and can be used with hoses for the supply of diesel, compressed air and water at low pressure.

Please see catalogue pages 242 and 243 for the selection of the required hoses.



Art. no. 9254



Art. no. 9769  
Art. no. 9773

Pivoting wall mounting bracket

| Art. no. | Max working pressure | Connection threads IN - OUT | Internal Ø swivel joint | Max Ø hose | Max length hose 1/4" - 3/8" - 1/2" | Spool width | Suitable pivoting wall bracket | Included swivel joint | Weight | Dimensions (LxWxH) (mm) |
|----------|----------------------|-----------------------------|-------------------------|------------|------------------------------------|-------------|--------------------------------|-----------------------|--------|-------------------------|
| 9251     | 600 bar              | 1/2" (M) - 1/2" (F)         | 10 mm                   | 1/2"       | 25 - 20 - 15 m                     | 120 mm      | 9767                           | 9951                  | 8 kg   | 250 x 530 x 480         |
| 9252     | 600 bar              | 1/2" (M) - 1/2" (F)         | 10 mm                   | 1/2"       | 50 - 35 - 25 m                     | 150 mm      | 9768                           | 9951                  | 9 kg   | 280 x 530 x 480         |
| 9253     | 600 bar              | 1/2" (M) - 1/2" (F)         | 10 mm                   | 1/2"       | 70 - 50 - 35 m                     | 200 mm      | 9773                           | 9951                  | 12 kg  | 320 x 530 x 480         |
| 9256     | 600 bar              | 1/2" (M) - 1/2" (F)         | 10 mm                   | 1/2"       | 100 - 70 - 50 m                    | 400 mm      | 9769                           | 9951                  | 12 kg  | 320 x 530 x 480         |

| Art. no. | Max working pressure | Connection threads IN - OUT | Internal Ø swivel joint | Max Ø hose | Max length hose 3/4" - 1" | Spool width | Suitable pivoting wall bracket | Included swivel joint | Weight | Dimensions (LxWxH) (mm) |
|----------|----------------------|-----------------------------|-------------------------|------------|---------------------------|-------------|--------------------------------|-----------------------|--------|-------------------------|
| 9254     | 100 bar              | 1" (M) - 1" (M)             | 20 mm                   | 1"         | 15 - 12 m                 | 200 mm      | 9773                           | 9973                  | 12 kg  | 320 x 530 x 480         |
| 9255     | 100 bar              | 1" (M) - 1" (M)             | 20 mm                   | 1"         | 25 - 20 m                 | 400 mm      | 9769                           | 9973                  | 15 kg  | 480 x 530 x 480         |

## Ø max 1/2" - up to 50 m length



Art. no. **9261 - 9262 - 9263 - 9264**

Art. no. **9261 - 9262 - 9263 - 9264**

Manual, hand crank hose reel, in painted steel, with **double arm support**, suitable for hoses of max 100 m length in 1/4" or max 50 m length in 1/2".

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease and compressed air, with a max working pressure of 600 bar and a max fluid temperature of 40°C.

On demand other swivel joints can be installed on the reel (see catalogue pages 238 - 240!).



Art. no. **9561 - 9562 - 9563 - 9564**

Art. no. **9561 - 9562 - 9563 - 9564**

Manual, hand crank hose reel, in stainless steel AISI 304, with **double arm support**, suitable for hoses of max 100 m length in 1/4" or max 50 m length in 1/2".

The hose reel is supplied without hoses and can be used with hoses for the supply of water and compressed air, with a max working pressure of 200 bar and a max fluid temperature of 150°C.

On demand other swivel joints can be installed on the reel (see catalogue pages 238 - 240!).

| Art. no.    | Max working pressure | Connection threads IN - OUT | Internal ø swivel joint | Max ø hose | Max length hose 1/4" - 3/8" - 1/2" | Spool width | Included swivel joint | Weight | Dimensions (LxWxH) (mm) |
|-------------|----------------------|-----------------------------|-------------------------|------------|------------------------------------|-------------|-----------------------|--------|-------------------------|
| <b>9261</b> | 600 bar              | 1/2" (M) - 1/2" (F)         | 10 mm                   | 1/2"       | 50 - 35 - 25 m                     | 150 mm      | 9951                  | 9 kg   | 450x300x500             |
| <b>9262</b> | 600 bar              | 1/2" (M) - 1/2" (F)         | 10 mm                   | 1/2"       | 70 - 50 - 35 m                     | 200 mm      | 9951                  | 10 kg  | 450x350x500             |
| <b>9263</b> | 600 bar              | 1/2" (M) - 1/2" (F)         | 10 mm                   | 1/2"       | 80 - 60 - 43 m                     | 250 mm      | 9951                  | 11 kg  | 450x400x500             |
| <b>9264</b> | 600 bar              | 1/2" (M) - 1/2" (F)         | 10 mm                   | 1/2"       | 100 - 70 - 50 m                    | 300 mm      | 9951                  | 12 kg  | 450x450x500             |
| <b>9561</b> | 200 bar              | 1/2" (M) - 1/2" (F)         | 10 mm                   | 1/2"       | 50 - 35 - 25 m                     | 150 mm      | 9963                  | 9 kg   | 450x300x500             |
| <b>9562</b> | 200 bar              | 1/2" (M) - 1/2" (F)         | 10 mm                   | 1/2"       | 70 - 50 - 35 m                     | 200 mm      | 9963                  | 10 kg  | 450x350x500             |
| <b>9563</b> | 200 bar              | 1/2" (M) - 1/2" (F)         | 10 mm                   | 1/2"       | 80 - 60 - 43 m                     | 250 mm      | 9963                  | 11 kg  | 450x400x500             |
| <b>9564</b> | 200 bar              | 1/2" (M) - 1/2" (F)         | 10 mm                   | 1/2"       | 100 - 70 - 50 m                    | 300 mm      | 9963                  | 12 kg  | 450x450x500             |

## Ø max 1/2" - up to 50 m length

Art. no. **9551**

Manual, hand crank hose reel, in stainless steel AISI 304, with **single arm support**, suitable for hoses of max 20 m length in 3/8".

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease, compressed air and water.



Art. no. **9551**

Art. no. **9553**

Manual, hand crank hose reel, in stainless steel AISI 304, with **double arm support**, suitable for hoses of max 20 m length in 3/8".

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease, compressed air and water.



Art. no. **9553**

Art. no. **9550**

Manual, hand crank hose reel, in stainless steel AISI 304, with **single arm support**, suitable for hoses of max 50 m length in 1/2".

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease, compressed air and water.



Art. no. **9550**

Art. no. **9552**


Manual, hand crank hose reel, in stainless steel AISI 304, with **double arm support**, suitable for hoses of max 35 m length in 1/2".

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease, compressed air and water.




Art. no. **9552**

| Art. no.    | Max working pressure | Connection threads IN - OUT | Internal ø swivel joint | Max. ø hose | Max length hose 1/4" - 3/8" - 1/2" | Included swivel joint | Weight | Dimensions (LxWxH) (mm) |
|-------------|----------------------|-----------------------------|-------------------------|-------------|------------------------------------|-----------------------|--------|-------------------------|
| <b>9551</b> | 200 bar              | 1/2" (M) - 3/8" (F)         | 10 mm                   | 1/2"        | 22 - 20 - 15 m                     | 9963                  | 9 Kg   | 300x390x330             |
| <b>9553</b> | 200 bar              | 1/2" (M) - 1/2" (F)         | 10 mm                   | 1/2"        | 22 - 20 - 15 m                     | 9963                  | 10 Kg  | 320x400x400             |
| <b>9550</b> | 200 bar              | 1/2" (M) - 1/2" (F)         | 10 mm                   | 1/2"        | 80 - 70 - 50 m                     | 9963                  | 15 Kg  | 370x500x460             |
| <b>9552</b> | 200 bar              | 1/2" (M) - 1/2" (F)         | 10 mm                   | 1/2"        | 60 - 50 - 35 m                     | 9963                  | 13 Kg  | 300x500x460             |



## Ø max 1" - up to 20 m length

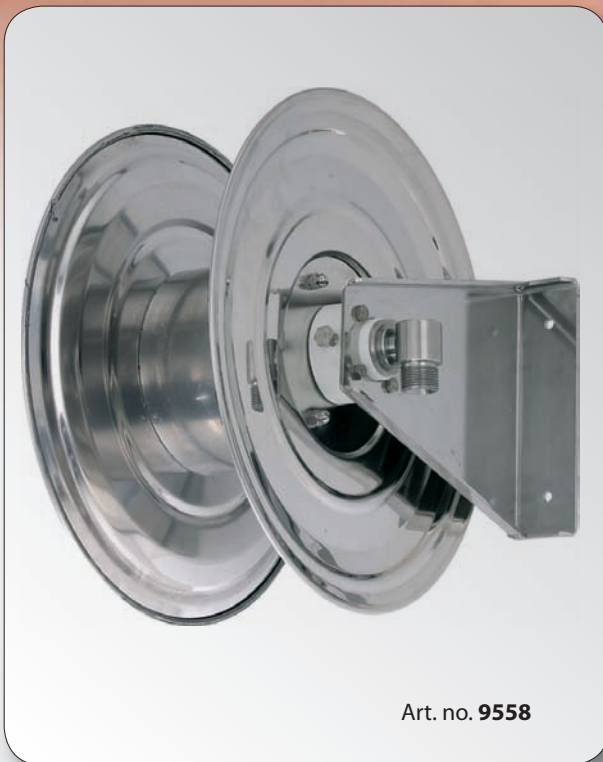

Art. no. 9558

Art. no. **9558**

Manual, hand crank hose reel, in stainless steel AISI 304, with **single arm support**, suitable for hoses of max 20 m length in 1".

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease, compressed air and water.

The max working pressure is 20 bar, the max temperature 150°C.  
The reel is equipped with gaskets in EPDM.




Art. no. 9559-9560

Art. no. **9559-9560**

Manual, hand crank hose reel, in stainless steel AISI 304, with **double arm support**, suitable for hoses of max 10 m length in 1" (art. no. 9559) and 20 m length in 1" (art. no. 9560).

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, compressed air and water.

The max working pressure is 20 bar, the max temperature 150°C.  
The reel is equipped with gaskets in EPDM.

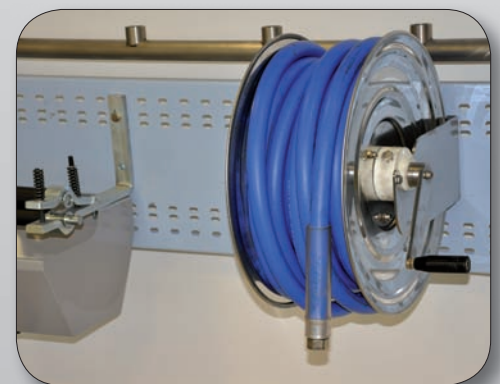

| Art. no.    | Max working pressure | Connection threads IN - OUT | Internal ø swivel joint | Max. ø hose | Max length hose 3/4" - 1" | Included swivel joint | Weight | Dimensions (LxWxH) (mm) |
|-------------|----------------------|-----------------------------|-------------------------|-------------|---------------------------|-----------------------|--------|-------------------------|
| <b>9558</b> | 100 bar              | 1" (M) - 3/4" (F)           | 20 mm                   | 1"          | 35 m - 20 m               | 9986                  | 13 Kg  | 550x340x460             |
| <b>9559</b> | 100 bar              | 1" (M) - 3/4" (F)           | 20 mm                   | 1"          | 20 m - 10 m               | 9986                  | 14 Kg  | 500x270x460             |
| <b>9560</b> | 100 bar              | 1" (M) - 3/4" (F)           | 20 mm                   | 1"          | 25 m - 20 m               | 9986                  | 15 Kg  | 500x270x460             |

