


Art. no. **6561**

Pneumatic, selfpriming rotary vane pump for the transfer of petrol, with body in cast iron with anticorrosive coating and plastic rotor. The pump is equipped with an earth cable to enable an electrostatic discharge and is constructed in accordance with directive ATEX 94/9/EC.



Art. no.	Compressed air supply	Max outlet pressure	Max delivery	Connection threads	Weight	Dimensions (LxWxH) (mm)
6561	1 – 4 bar	4 bar	35 l/min	3/4" BSP (F)	3 kg	140x150x190

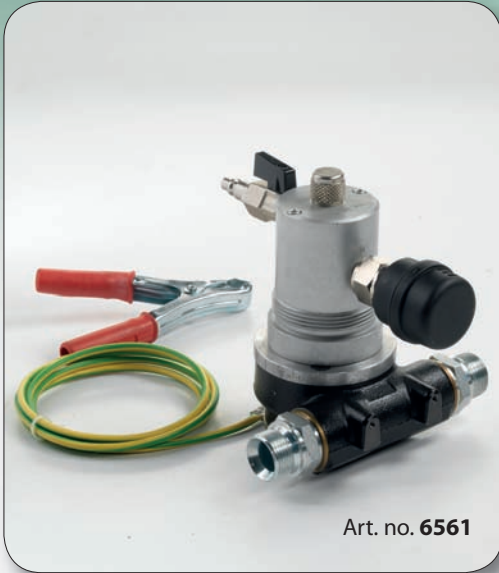

Art. no. **6561**

Art. no. **6930**

Pneumatic 1:1 – piston pump, suitable for the suction and the transfer of petrol. The pump is equipped with an earth cable to enable an electrostatic discharge and is constructed in accordance with directive ATEX 94/9/EC.



Art. no.	Compressed air supply	Max outlet pressure	Max delivery	Connection threads	Weight	Dimensions (LxWxH) (mm)
6930	2 – 6 bar	6 bar	25 l/min	3/4" BSP (F)	8 kg	530x120x90




Art. no. **6930**

Art. no. **6931**

Electric, selfpriming 12 VDC – rotary vane pump (on demand also available in 230 VAC) for the transfer of petrol, with painted body in cast iron with anticorrosive coating, anti-noise filter (electromagnetic compatibility EMC), thermal protection, non-return valve, pressure relief valve, built-in bypass valve and 2 m – cable with alligator clamps for battery connection. The pump is constructed in accordance with directive ATEX 94/9/EC – IECEx (group II – category 2 – G Ex d IIA T4 Gb).



Art. no.	Voltage	Power	Current drain	Delivery	Connection threads	Weight	Dimensions (LxWxH) (mm)
6931	12 VDC	250 W	50 l/min	21 A	1" BSP (F)	7 kg	195x355x270

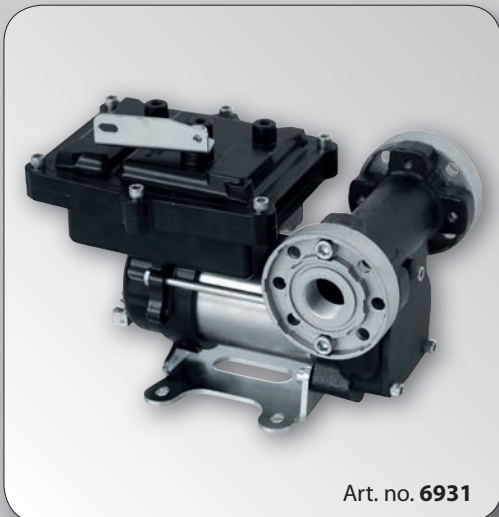

Art. no. **6931**