



Art. no. **6700**

Manual diesel dispensing nozzle, body in aluminium, with plastic hose tail \varnothing 25 mm and dispensing outlet with \varnothing ext. 25 mm, with latch for locking of trigger.
Max flow rate 90 l/min.
The nozzle can also be used for the dispensing of oils with a max. pressure of 7 bar.

Art. no. **6701**

Same as art. no. 6700, but with inlet swivel 1" BSP (M-F).



Art. no. **6702**

Manual diesel dispensing nozzle, body in aluminium with plastic handle protector, with inlet swivel 1" BSP (M-F) and dispensing outlet with \varnothing ext. 25 mm, with latch for locking of trigger.
Max flow rate 150 l/min.




Art. no. **6725**

Automatic diesel dispensing nozzle, body in aluminium with rubber protection, with inlet swivel 1" BSP (M-F) and dispensing outlet with \varnothing ext. 24 mm.
Max flow rate 60 l/min.

Art. no. **6726**

Automatic diesel dispensing nozzle, body in aluminium with rubber protection, with inlet swivel 1" BSP (M-F) and dispensing outlet with \varnothing ext. 29 mm.
Max flow rate 120 l/min.

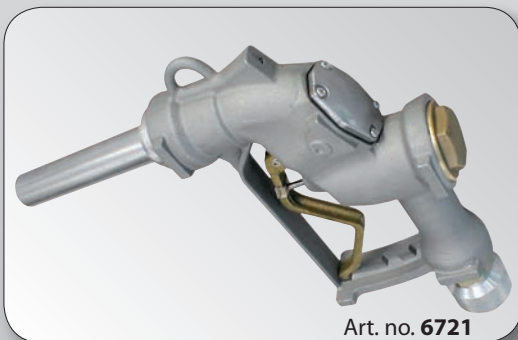

Art. no. **6721**

Automatic diesel dispensing nozzle, high delivery version, body in aluminium, with inlet swivel 1 1/2" BSP (M-F) and dispensing outlet with \varnothing ext. 39 mm, with latch for locking of trigger.
Max flow rate 280 l/min.



Art. no. **2107**

Art. no. **2107/34**

Inlet swivel 3/4" BSP (M) – 1" BSP (F).

Art. no. **2107/10**

Inlet swivel 1" BSP (M) – 1" BSP (F).

Art. no. **2107/35**

Inlet swivel 3/4" BSP (M) – 1" BSP (M).

Art. no. **2107/36**

Inlet swivel 1" BSP (M) – 1" BSP (M).

Art. no. **2107/33**

Inlet swivel 3/4" BSP (M) – 3/4" BSP (M).