

STP 油壓床

- 自動化焊接，結構强度高，耐用性佳。
- 千斤頂可左右移動，用途廣泛。
- 所有型號均含壓力錶及V型墊塊。

Hydraulic Presses


- ※Automatic welding frame for maximum strength and long life.
- ※Roller head design allows movement and lock the cylinder from side to side, suitable for different condition.
- ※Gauges and V-Blocks are included on all models.



V型墊塊： V-Blocks

使用圓型或其他不規則材料時更得心應手

Design for easy fixturing of round or other nonuniform materials.

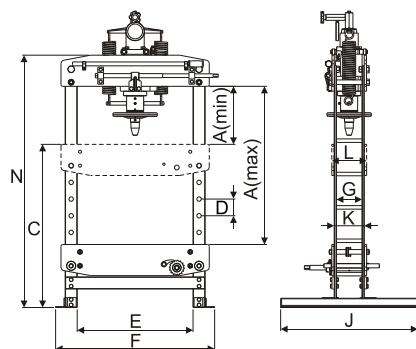


STP-15 / STP-15A




STP-35

STP-15

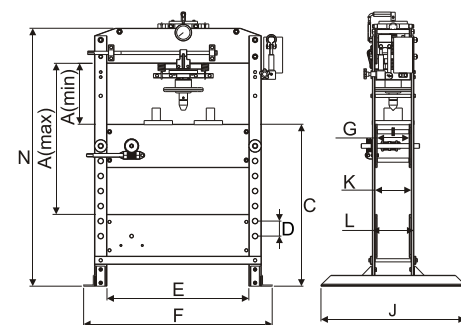

STP-35 / STP-35A / STP-35E

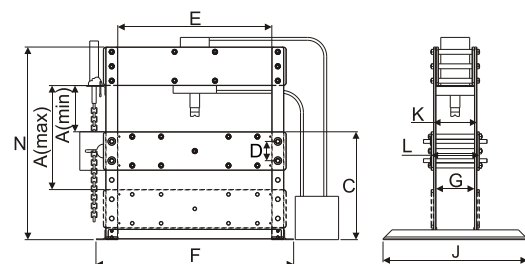

STP-60E STP-100E

Model Number 型號	Cylinder Capacity 能力 ton(kN)	Screw Stroke 輔助高 (mm)	Ram Stroke 揚程 (mm)	Operating Pressure 使用壓力 (kgf/cm ²)	Press Modal Pump 幫浦樣式 ²⁾	Output Flow Rate 輸出油量	Dimensions(mm) 外型尺寸											Wt. 重量 (kg)
							A (max)	A (min)	C	D	E	F	G	J	K	L	N	
STP-15	15(148)	90	108	300	H	5c.c./once	1000	310	880	90	625	858	138	740	162	188	1510	168
STP-35	35(335)	125	172	360	H	6c.c./once	1085	335	970	90	850	1130	192	865	217	249	1695	220
STP-35AH ¹⁾				360	A & H	750c.c./min												222
STP-35EH ¹⁾				360	E & H	8750c.c./min												250
STP-60E ¹⁾	60(523)	—	310	70 210	E	8750c.c./min 3000c.c./min	1050	250	1350	100	1050	1380	268	1000	306	338	1900	670
STP-100E ¹⁾	100(1010)	—	300	70 210	E	8750c.c./min 3000c.c./min	1080	480	1120	200	1600	2050	400	1500	450	500	2000	1500

1) STP-35AH : Air pressure 7~10kgf/cm² STP-35EH : 0.5HP*110/ 220V*1PH STP-60E : 3HP*220V*3PH STP-100E : 5HP*220V*3PH
STP-35AH : 使用空壓 7~10kgf/cm² STP-35EH : 0.5HP*110/220V*1PH STP-60E : 3HP*220V*3PH STP-100E : 5HP*220V*3PH


2) H: by manual A: by air E: by electric H / 手動 A / 氣動 E / 電動

SIP 美規油壓床

- 高強度結構、耐用度高，使用範圍廣泛。
- 液壓式平台，上下調整輕便 (10噸系列為手動式)。
- 可任意搭配使用手動、氣動、電動等動力來源。
- 所有型號均含壓力錶及V型墊塊。(10噸系列無配附V型墊塊)

Hydraulic Presses With Imperial Dimension

- ※High strength structure and durable.
- ※Hydraulic-lift bed for effortless adjustment in the vertical direction.(10 ton models are manual)
- ※Multi-selection for power source, such as manual, pneumatic and electric.
- ※Gauges and V-Blocks are included on all models.
(Capacity 10 ton series is not equipped with V-Block)

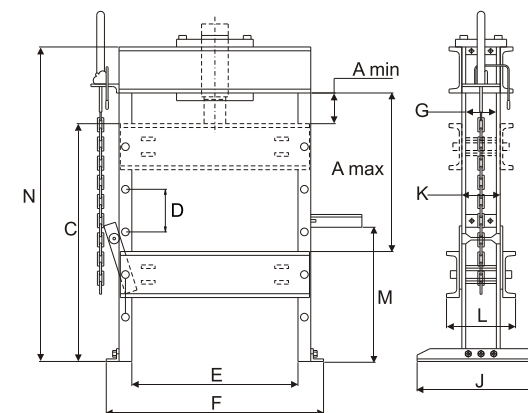

Pump Model 電動泵浦型號	Motor 馬達	Oil cap. 油箱容量
SIP-10E	0.5hp, 115V/ 220V ,50/60Hz,1ph	3000c.c
SIP-256E	0.5hp, 115V/ 220V ,50/60Hz,1ph	3000c.c
SIP-2514E	1hp, 115V/ 220V ,50/60Hz,1ph	3000c.c
SIP-30E	1hp, 115V/ 220V ,50/60Hz,1ph	3000c.c
SIP-506E	0.5hp, 115V/ 220V ,50/60Hz,1ph	3000c.c
SIP-5013E	2hp, 115V/ 220V ,50/60Hz,1ph	5gal.
SIP-100E	2hp, 115V/ 220V ,50/60Hz,3ph	5gal.
SIP-150E	2hp, 115V/ 220V ,50/60Hz,3ph	5gal.
SIP-200E	3hp, 115V/ 220V ,50/60Hz,3ph	5gal.

Press Model Number 壓床型號	Cap. 能力 ton(kN)	Cylinder Model Number 油壓缸型號	Pump 泵 浦	H-Frame Press Dimensions (mm) 外型尺寸											
				Vertical Daylight 工作檯面高度		C	D	E	F	G	J	K	L	M	N
				A (max)	A (min)										
SIP-RSC1010	10(101)	RSC-1010	H A E	1016	62	1187	127	473	632	—	756	108	189	889	1321
SIP-RSR1010		RSR-1010													
SIP-RSC256	25(232)	RSC-256	H A E	1384	178	1448	302	737	1029	102	762	133	272	673	1930
SIP-RSC2514		RSR-2514													
SIP-RSC308	30(295)	RSC-308	H A E	1384	178	1448	302	737	1029	102	762	133	272	673	1930
SIP-RSR3014		RSR-3014													
SIP-RSC506	50(498)	RSC-506	H	1233	179	1372	264	730	1086	127	914	184	365	781	1930
SIP-RSC5013		RSC-5013	A												
SIP-RSR5013		RSR-5013	E												
SIP-RSC10010	100(933)	RSC-10010	H	1080	178	1295	297	889	1295	171	914	222	441	842	1930
SIP-RSR1006		RSR-1006	A												
SIP-RSR10013		RSR-10013	E												
SIP-RSR15013	150(1386)	RSR-15013	E	1232	318	1384	254	1219	1706	232	1118	333	555	1213	2286
SIP-RSR20013	200(1995)	RSR-20013	E	1232	318	1384	254	1219	1706	232	1118	333	555	1213	2286

H : 手動 Hand Pumps A : 氣動 Air Hydraulic Pumps E : 電動 Electric Pumps