

SPE-554 SERIES

SPE-554 電動油壓/扭力扳手泵浦

- 外部調壓。
- 內置釋放閥保護裝置。
- SPE-554TQ系列：適用於液壓扭力扳工具。
- SPE-554TQJ系列：適用於各類液壓舉升工具(參考56頁)。
- 選配八孔1/4"口徑同步分流器(含公母快速接頭及防塵蓋)，可4組扳手同步作業。
- 馬達空轉可設定20、40、60秒後自動停止並洩壓。
- 安全啟動裝置：停止後需再按啟動鈕才可使用。
- 氣冷式油溫冷卻系統。

Hydraulic Electric/Torque Wrench Pump

- ※ External adjustable pressure regulator.
- ※ Retract side internal relief valve protects tool.
- ※ SPE-554TQ series: just use with Hydraulic Torque Wrench.
- ※ SPE-554TQJ series: just use with Hydraulic lift applications.
- ※ Opt eight 1/4" ports (include female and male couplers with dust cap), that can synchronize work for 4 hydraulic wrench.
- ※ It can be set automatic stop moving as motor idle running till 20、40、60 seconds and pressure release.
- ※ Safety start: After stopping, need to press another start button to continue.
- ※ Heat Exchanger Kit: Design air cooling to avoid pump overheating and costly repair from long work periods.

電泵型號選擇：Custom build your Electric Pump:

SPE-554TQ 1 5 1 8 2 0
0 1 2 3 4 5 6

0.樣式
TQ=扭力扳手專用
TQJ=一般舉升適用

1.電壓
1=115V
2=230V

2.Hz
5=50Hz / 60Hz

3.相數
1=單相

4.油箱 (Lx0.26=gal)
8=8L(2.1gal)
20=20L(5.2gal)
★亦可依客戶訂製

5.多通閥(含1/4"公-母快速接頭)
1=1座及1公-1母快速接頭
2=1座及2公-2母快速接頭(標準件)
3=1座及3公-3母快速接頭
4=1座及4公-4母快速接頭

6.選配
W=輪子
O=冷卻系統

0.Type
TQ= just use in Torque Wrench
TQJ= using in lift applications

1.Voltage
1=115V
2=230V

2.Hz
5=50Hz / 60Hz

3.Phase
1=single phase


4.Reservoir (Lx0.26=gal)
8=8L(2.1gal)
20=20L(5.2gal)
★User can order suitable reservoir.

5.Manifold (include 1/4" male-female coupler)
1=1 manifold with 1 male and 1 female coupler
2=1 manifold with 2 male and 2 female couplers (standard)
3=1 manifold with 3 male and 3 female couplers
4=1 manifold with 4 male and 4 female couplers

6.Optional
W=Wheel
O=Cool system



SPE-554TQ

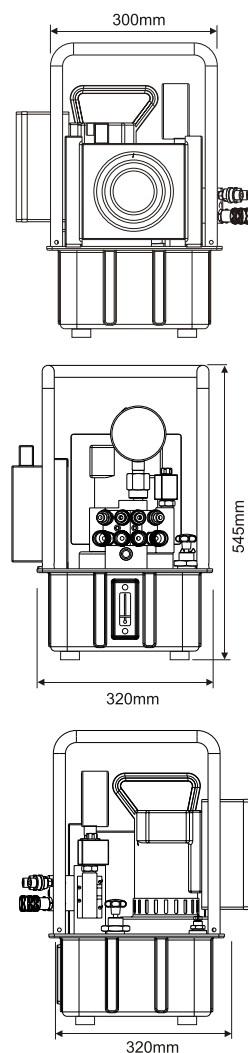


Model Number 型 號	Rpm 轉速	dBA at Idle and 700bar 噪音值	Motor 馬達 kW (hp)	Amp at 700bar 安培	Flow rate @115VAC(L/min) 流量				Oil tank 油箱 (L)	Usable oil 可用油量 (L)	Weight (with oil) 重量 (含油) (kg)
					0 (bar)	50 (bar)	350 (bar)	700 (bar)			
SPE-554	12000	80	0.84 (1-1/8)	25 /110V	11.3	7.1	1.2	0.9	8	7	32
				13 /230V							

SPE-23TQ 電動油壓/扭力扳手泵浦

- 外部調壓及調速。
- 內置釋放閥保護裝置。
- 選配八孔1/4"口徑同步分流器(含公母快速接頭及防塵蓋)，可4組扳手同步作業。
- 馬達空轉可設定20、40、60秒後自動停止。
- 安全啟動裝置：停止後需再按啟動鈕才可使用。
- 停電時自動釋壓。
- 氣冷式油溫冷卻系統，油溫散熱效果強
- 高效能自動切換三段式流量。
- 標準配件24V遙控器。
- 可適用於各類扳工具，尤其搭配SUN RUN油壓扳手展現最佳工作效率。
- 馬達"電機"控制，操作容易且具防錯插槽。

Hydraulic Electric/Torque Wrench Pump

- ※ External adjustable pressure regulator and speed.
- ※ Retract side internal relief valve protects tool.
- ※ Opt eight 1/4" ports (include female and male couplers with dust cap), that can synchronize work for 4 hydraulic wrench.
- ※ It can be set automatic stop moving as motor idle running till 20、40、60 seconds.
- ※ Safety start: After stopping, need to press another start button to continue.
- ※ Auto releaase pressure as no power.
- ※ Heat Exchanger Kit: Design air cooling to avoid pump overheating and costly repair from long work periods.
- ※ High Efficiency, Tri-speed automatic.
- ※ Standard 24V remote.
- ※ All-tool adjustability, regular ratchet tools or suit with SUN RUN hydraulic torque wrench for best performance.
- ※ Brushless motor control and prevent mistake design, more easy to work.

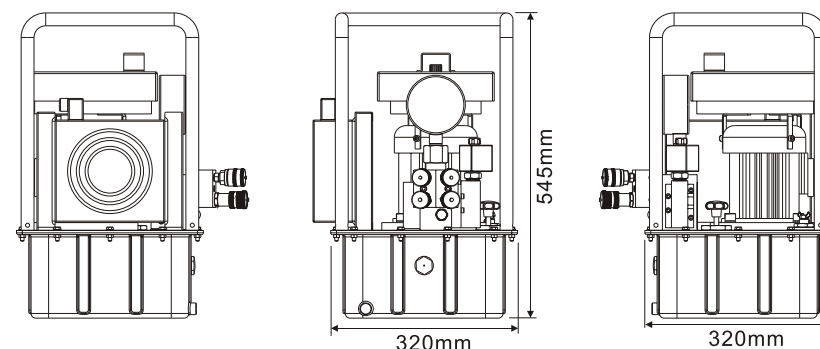

電泵型號選擇：Custom build your Electric Pump:

SPE-23TQ 2 5 1 5 2 0
0 1 2 3 4 5 6

0.樣式
TQ=扭力扳手專用

1.電壓
1=110V
2=230V

2.Hz
5=50Hz
6=60Hz

3.相數
1=單相

4.油箱 (Lx0.26=gal)
5=5L(1.3gal)
8=8L(2.1gal) 標準
★亦可依客戶訂製

5.多通閥(含1/4"公-母快速接頭)
1=1座及1公-1母快速接頭
2=1座及2公-2母快速接頭(標準件)
3=1座及3公-3母快速接頭
4=1座及4公-4母快速接頭

6.選配
W=輪子
O=冷卻系統

0.Type
TQ= just use in Torque Wrench

1.Voltage
1=110V
2=230V


2.Hz
5=50Hz
6=60Hz

3.Phase
1=single phase

4.Reservoir (Lx0.26=gal)
5=5L(1.3gal)
8=8L(2.1gal) Standard
★User can order suitable reservoir.


5.Manifold (include 1/4" male-female coupler)
1=1 manifold with 1 male and 1 female coupler
2=1 manifold with 2 male and 2 female couplers (standard)
3=1 manifold with 3 male and 3 female couplers
4=1 manifold with 4 male and 4 female couplers

6.Optional
W=Wheel
O=Cool system

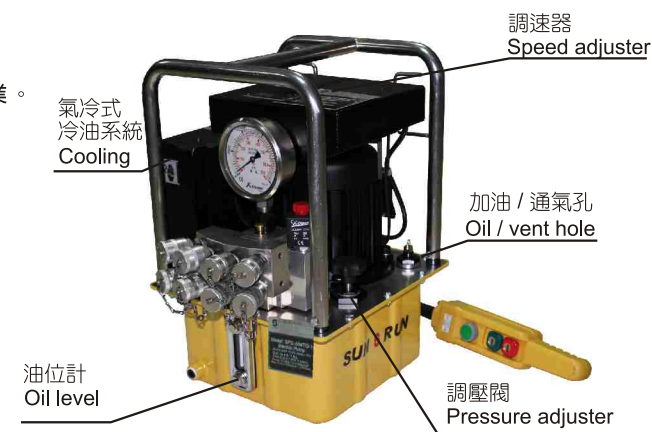

SPE-23TQ2815

調速-扭力轉換表 Speed adjuster-torque conversion chart	
刻度值 Scale	扭力(N.m) Torque
40	3000
50	5000
60	8000
70	11000
80	16000
90	28000
100	35000

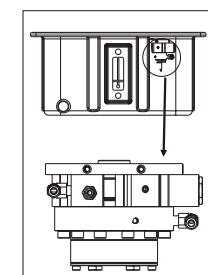

三段式流量切換閥
Tri-speed automatic

Model Number 型 號	Rpm 轉速	dBA at Idle and 700bar 噪音值	Motor 馬達 kW (hp)	Amp at 700bar 安培	Flow rate @230VAC(L/min) 流量			Oil tank 油箱 (L)	Weight (with oil) 重量 (含油) (kg)
					70 (bar)	400 (bar)	700 (bar)		
SPE-23TQ	2400	80	1.5 (2)	13 /230V	16	1.3	0.65	8	36.2