

SV/W ※單位 unit (mm)


手動操控閥

- 當油壓缸回縮時得以手動開啓方式使油流回油箱。
- 單動及雙動油壓缸均適用。

Manually Operated Check Valve

※ Valve is manually opened to allow oil to flow back to tank when cylinder retracts.

※ Used for load holding applications with single and double acting cylinder.

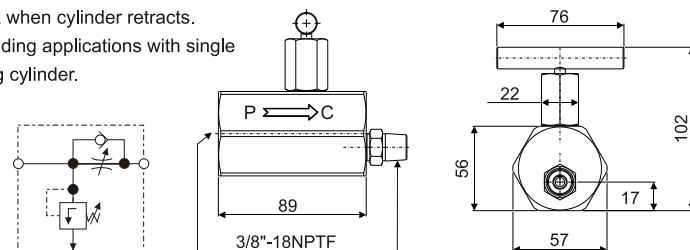

SV-66


單向逆止手動回油調節閥

- 當油壓缸回縮時得以手動開啓方式使油流回油箱。
- 單動及雙動油壓缸均適用。

Manually Operated Check Valve

※ Valve is manually opened to allow oil to flow back to tank when cylinder retracts.

※ Used for load holding applications with single and double acting cylinder.

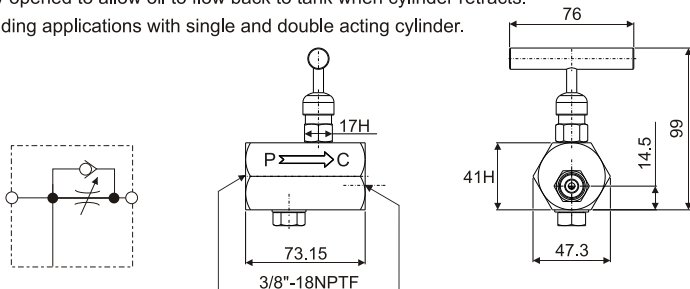

SV-66-3

液控單向閥

- 當油壓系統壓力減少時，安裝於千斤頂可維持荷重。
- 通常與雙動千斤頂搭配使用，承受自千斤頂上回油T型接頭的壓力。
- 3/8" NPTF 母接頭孔。
- 單向閥壓縮比 14% (6.5:1)


Pilot Operated Check Valve

※ Can be mounted at the cylinder to hold the load in case of system pressure loss.

※ Normally used with double-acting cylinders where pilot port receives pressure from a T-fitting in the cylinder retract line.

※ 3/8" NPTF female ports.

※ Pilot pressure ratio 14% (6.5:1)

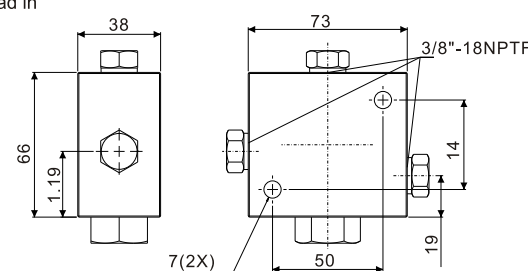

SV-42

針閥


- 3/8"-18NPTF母接頭。
- 可控制油壓缸速度。
- 亦可當作暫時維持的關閉閥。

Needle Valve

※ 3/8"-18NPTF female ports.

※ To control cylinder speed.

※ Also be used as shut-off valve for temporary load holding.

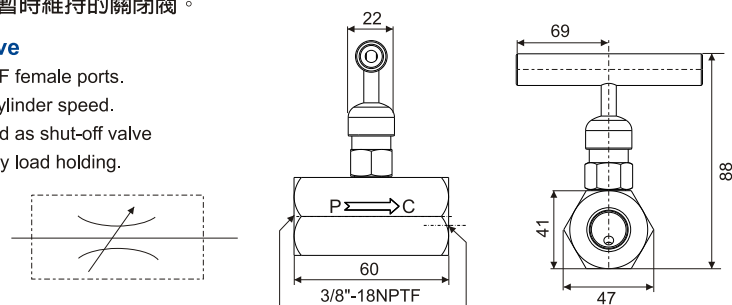

SV-82

SV/W Series

最大使用壓力
Maximum Operating Pressure
700 bar

控制閥

- 四口三位。
- 水平鎖定定位。
- 適用於雙動油壓缸及已安裝SV-66-3的單動油壓缸。
- 提供"前進、維持、回復"動作。

Control Valves

※ 4-way/3-position.

※ Lever operated, detent positioned.

※ Application : double-acting cylinders and single-acting cylinders which be equipped with SV-66-3.

※ Provides "advance", "hold" and "return".


SV/W Series

最大使用壓力
Maximum Operating Pressure
700 bar



SW-700

Model No. 型號	前進 Advance	持壓 Hold	回復 Retract
SW-700			
SW-700B			

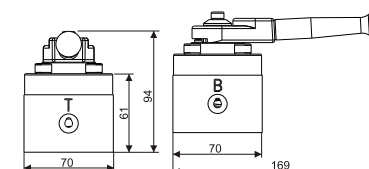

控制閥



- 三口二位手動方向閥。
- 可"前進、回復"動作。
- 可搭配使用單動千斤頂。

Control Valves

※ 3-way/2-position manual control valve.

※ Provides "advance" and "return".

※ For use with single-acting cylinder.

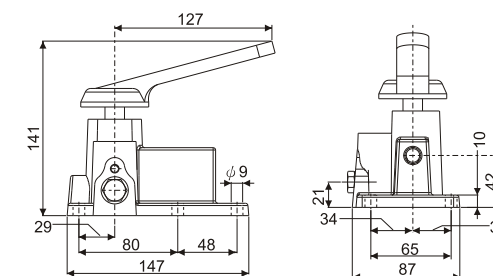

SVM-S2

控制閥

- 四口三位手動方向閥。
- 可"前進、維持、回復"動作。
- 中立回油，水平鎖定定位。
- 可搭配使用雙動千斤頂或二具單動千斤頂。



Control Valves

※ 4-way/3-position manual control valve.

※ Tandem center, lever operated, detent positioned.

※ Provides "advance", "hold" and "return".

※ For use with double-acting or two single-acting cylinder.

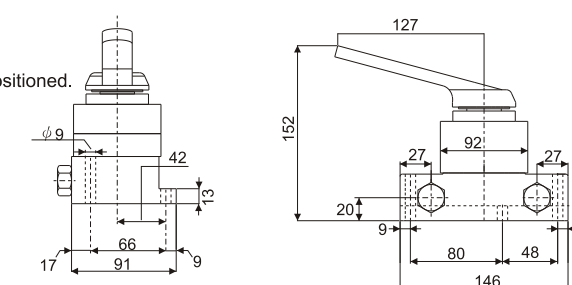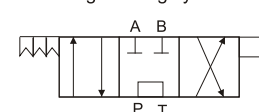

SVM-D4

控制閥

- 四口三位手動方向閥。
- 可"前進、維持、回復"動作。
- 中立回油，水平鎖定定位。
- 可搭配使用雙動千斤頂或二具單動千斤頂。



Control Valves

※ 4-way/3-position manual control valve.

※ Tandem center, lever operated, detent positioned.

※ Provides "advance", "hold" and "return".

※ For use with double-acting or two single-acting cylinder.

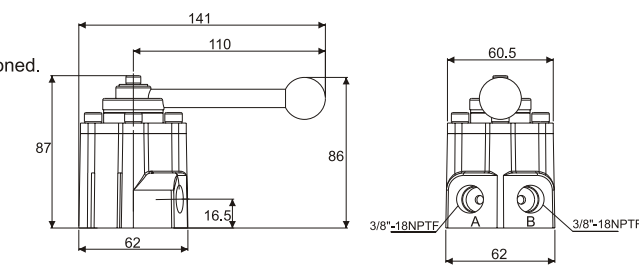

SVR-D4